

## ABYSS WHITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041259</b>	60X120	9,00	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
UPEC Classification	UPEC Classification	U3 P3 E3 C2

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

## ANTI-SLIP ABYSS WHITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041632</b>	60X120	9,00	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
UPEC Classification	UPEC Classification	U3 P3 E3 C2

#### CHEMICAL PROPERTIES

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



## ABYSS WHITE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041149</b>	100X100	10,20	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
UPEC Classification	UPEC Classification	U3 P3 E3 C2

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

## ANTI-SLIP ABYSS WHITE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041629</b>	100X100	10,20	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES


#### PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
UPEC Classification	UPEC Classification	U3 P3 E3 C2

#### CHEMICAL PROPERTIES

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11

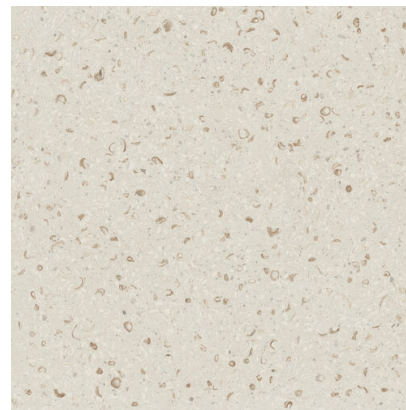

## ABYSS WHITE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041155</b>	60X60	8,90	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
UPEC Classification	UPEC Classification	U3 P3 E3 C2

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

## ABYSS SAND RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041257</b>	60X120	8,70	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
UPEC Classification	UPEC Classification	U3 P3 E3 C2

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

## ANTI-SLIP ABYSS SAND RECT

### 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041630</b>	60X120	9,00	PC BIA GL



#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
UPEC Classification	UPEC Classification	U3 P3 E3 C2

#### CHEMICAL PROPERTIES

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11

# APE

best for you

## ANTI-SLIP ABYSS SAND RECT

### 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041627</b>	100X100	10,00	PC BIA GL



#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES


Frost resistance	EN ISO 10545-12	It stands the test
UPEC Classification	UPEC Classification	U3 P3 E3 C2

#### CHEMICAL PROPERTIES

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



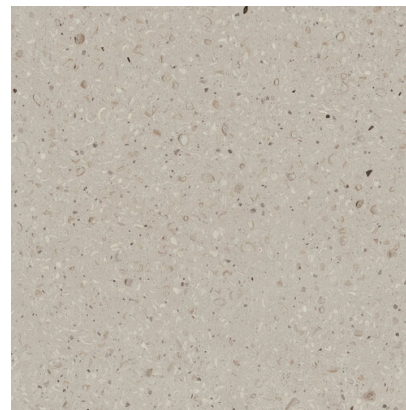

## ABYSS SAND RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041153</b>	60X60	8,80	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
UPEC Classification	UPEC Classification	U3 P3 E3 C2

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3



## LAVABO DE PIE ROMA

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A040867</b>		0,00	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

### CHEMICAL PROPERTIES