

AUGUSTUS PEARL NATURAL RECT 120X120



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A041005 | 120X120 | 9,00 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES


| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP CHARACTERISTICS

| | | |
|----------------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R) | EN 16165-B | 0.00 |
| Slip resistance (barefeet) | EN 16165-A | 0.00 |

AUGUSTUS PEARL NATURAL RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039601 | 60X120 | 8,70 | PC BIA GL |

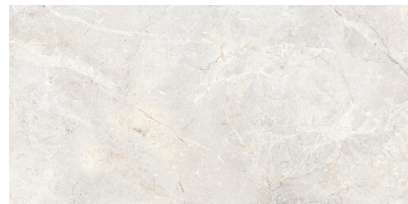

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |


CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

AUGUSTUS PEARL POL RECT

60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039609 | 60X120 | 9,00 | PC BIA GL |

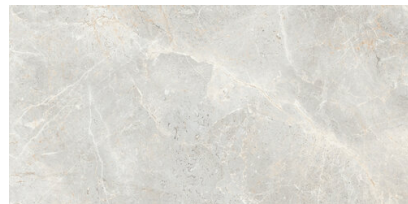

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES


| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO 10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP AUGUSTUS PEARL RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039613 | 60X120 | 8,70 | PC BIA GL |

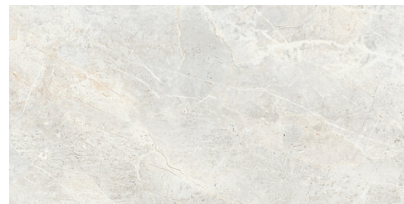

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |


CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP CHARACTERISTICS

| | | |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
| Slip resistance (R) | EN 16165-B | R11 |

AUGUSTUS PEARL NATURAL RECT 90X90

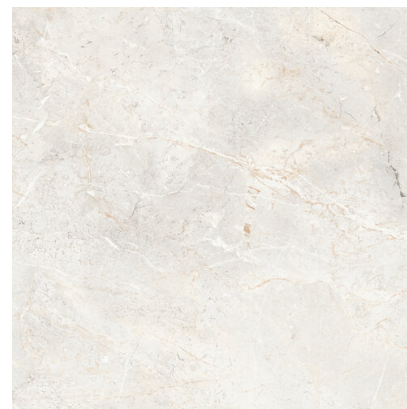

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039617 | 90X90 | 9,40 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES


| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

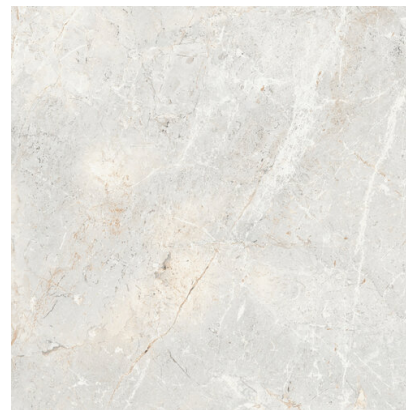

AUGUSTUS PEARL RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A040290 | 60X60 | 9,10 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GLB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 5 |

APE

best for you

MALLA AUGUSTUS PEARL NATURAL

30X31

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039931 | 30X31 | 9,40 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

APE

best for you

MOSAICO AUGUSTUS PEARL

NATURAL 30X30 (5X5)

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039919 | 30X30 | 8,90 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

AUGUSTUS PEARL RECT 30X90

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|---------|
| A040253 | 30X90 | 8,40 | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES


| | | |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10% |
| Flexion resistance | EN ISO 10545-04 | =>12 N/mm ² |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GLB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 3 |

CAESAR PEARL RECT 30X90

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|---------|
| A040256 | 30X90 | 10,80 | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES


| | | |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10% |
| Flexion resistance | EN ISO 10545-04 | =>12 N/mm ² |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GLB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 3 |

LACER MIX PEARL RECT 30X90

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|---------|
| A040259 | 30X90 | 8,70 | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10% |
| Flexion resistance | EN ISO 10545-04 | =>12 N/mm ² |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GLB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 3 |

AUGUSTUS GREY NATURAL RECT 120X120



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A041006 | 120X120 | 8,80 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP CHARACTERISTICS

| | | |
|----------------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R) | EN 16165-B | 0.00 |
| Slip resistance (barefeet) | EN 16165-A | 0.00 |

AUGUSTUS GREY NATURAL RECT

60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039602 | 60X120 | 8,70 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP CHARACTERISTICS

| | | |
|----------------------------|------------|------|
| Slip resistance (R) | EN 16165-B | 0.00 |
| Slip resistance (barefeet) | EN 16165-A | 0.00 |

AUGUSTUS GREY POL RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039610 | 60X120 | 9,20 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO 10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP AUGUSTUS GREY RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039614 | 60X120 | 9,10 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP CHARACTERISTICS

| | | |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
| Slip resistance (R) | EN 16165-B | R11 |

AUGUSTUS GREY NATURAL RECT

90X90



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039618 | 90X90 | 9,10 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alkalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |



AUGUSTUS GREY RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A040291 | 60X60 | 9,00 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | 0.00 |
|---|--------------|------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO 10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |


ANTI-SLIP CHARACTERISTICS

| | | |
|---------------------|------------|------|
| Slip resistance (R) | EN 16165-B | 0.00 |
|---------------------|------------|------|

MALLA AUGUSTUS GREY NATURAL

30X31

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039932 | 30X31 | 0,00 | PC BIA GL |

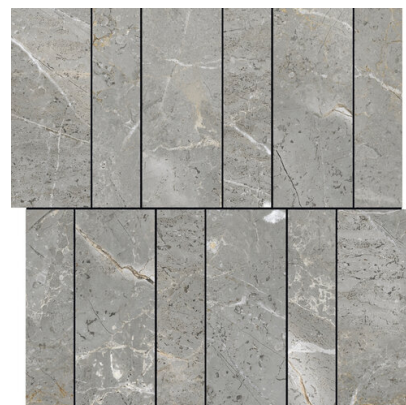

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

MOSAICO AUGUSTUS GREY NATURAL 30X30 (5X5)

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039920 | 30X30 | 0,00 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

AUGUSTUS GREY RECT 30X90

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|---------|
| A040255 | 30X90 | 8,90 | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

| | | |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10% |
| Flexion resistance | EN ISO 10545-04 | =>12 N/mm ² |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GLB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 3 |

CAESAR GREY RECT 30X90

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|---------|
| A040258 | 30X90 | 10,80 | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10% |
| Flexion resistance | EN ISO 10545-04 | =>12 N/mm ² |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GLB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 3 |

LACER MIX GREY RECT 30X90

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|---------|
| A040261 | 30X90 | 8,60 | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

| | | |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10% |
| Flexion resistance | EN ISO 10545-04 | =>12 N/mm ² |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GLB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 3 |

AUGUSTUS CREAM NATURAL RECT 120X120



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A041003 | 120X120 | 9,00 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES


| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP CHARACTERISTICS

| | | |
|----------------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R) | EN 16165-B | 0.00 |
| Slip resistance (barefeet) | EN 16165-A | 0.00 |

AUGUSTUS CREAM NATURAL RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039600 | 60X120 | 8,50 | PC BIA GL |

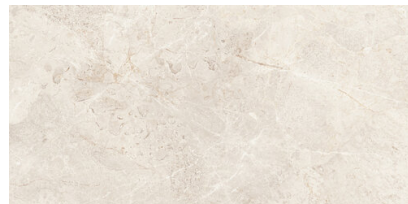

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

AUGUSTUS CREAM POL RECT

60X120



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039608 | 60X120 | 9,10 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP AUGUSTUS CREAM RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039612 | 60X120 | 8,70 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |


CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP CHARACTERISTICS

| | | |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
| Slip resistance (R) | EN 16165-B | R11 |

AUGUSTUS CREAM NATURAL RECT 90X90

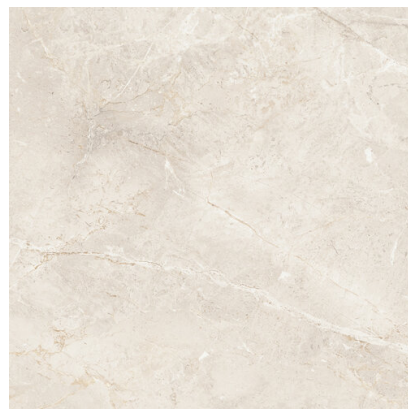

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039616 | 90X90 | 9,40 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |



AUGUSTUS CREAM RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A040289 | 60X60 | 9,00 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GLB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 5 |

MALLA AUGUSTUS CREAM

NATURAL 30X31

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039930 | 30X31 | 9,40 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

MOSAICO AUGUSTUS CREAM

NATURAL 30X30 (5X5)

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039918 | 30X30 | 0,00 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

AUGUSTUS CREAM RECT 30X90

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|---------|
| A040254 | 30X90 | 8,80 | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10% |
| Flexion resistance | EN ISO 10545-04 | =>12 N/mm ² |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GLB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 3 |

CAESAR CREAM RECT 30X90

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|---------|
| A040257 | 30X90 | 10,80 | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES


| | | |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10% |
| Flexion resistance | EN ISO 10545-04 | =>12 N/mm ² |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GLB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 3 |

LACER MIX CREAM RECT 30X90

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|---------|
| A040260 | 30X90 | 8,60 | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10% |
| Flexion resistance | EN ISO 10545-04 | =>12 N/mm ² |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GLB |
| Resistance to cleaning products | EN ISO 10545-13 | GB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB |
| Stains resistance | EN ISO 10545-14 | 3 |

AUGUSTUS BROWN NATURAL RECT 120X120



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A041004 | 120X120 | 9,00 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | III |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP CHARACTERISTICS

| | | |
|----------------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R) | EN 16165-B | 0.00 |
| Slip resistance (barefeet) | EN 16165-A | 0.00 |

AUGUSTUS BROWN NATURAL RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039603 | 60X120 | 8,80 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO 10545-07 | III |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

AUGUSTUS BROWN POL RECT

60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039611 | 60X120 | 8,80 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO 10545-07 | III |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP AUGUSTUS BROWN RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039615 | 60X120 | 9,00 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | III |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

ANTI-SLIP CHARACTERISTICS

| | | |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
| Slip resistance (R) | EN 16165-B | R11 |

AUGUSTUS BROWN NATURAL RECT 90X90



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039619 | 90X90 | 9,30 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

PHYSICAL PROPERTIES

| | | |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm ² |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | III |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

CHEMICAL PROPERTIES

| | | |
|--|-----------------|-----|
| Resistance to acids | EN ISO 10545-13 | GHB |
| Resistance to alcalis | EN ISO 10545-13 | GHB |
| Resistance to cleaning products | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance | EN ISO 10545-14 | 5 |

MALLA AUGUSTUS BROWN

NATURAL 30X31

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039933 | 30X31 | 9,40 | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

MOSAICO AUGUSTUS BROWN NATURAL 30X30 (5X5)



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A039921 | 30X30 | 9,00 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES



LAVABO DE PIE ROMA

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|----------------|-----------|----------------|-----------|
| A040867 | | 0,00 | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES