

## BLACK HISPANIA NATURAL RECT 120X278

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041062</b>	120X278	6,50	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 45 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	0.00
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,42

## BLACK HISPANIA MATT RECT

### 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A041130</b>	60X120	8,80	PC BIA GL



#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

## BLACK HISPANIA POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A040952</b>	60X120	8,80	PC BIA GL

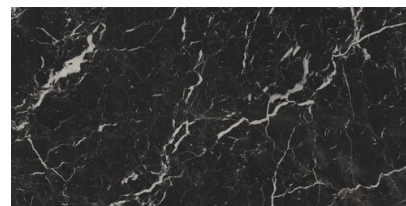

### DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5



## LAVABO DE PIE ROMA

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A040867</b>		0,00	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

### CHEMICAL PROPERTIES