


## CROSS WHITE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038335</b> | 60X120    | 10,80          | PC BIA GL |

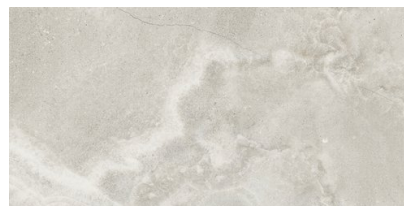

### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |


#### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to acids                                    | EN ISO 10545-13 | GA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 5  |

## ANTI-SLIP CROSS WHITE RECT

### 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038531</b> | 60X120    | 9,10           | PC BIA GL |

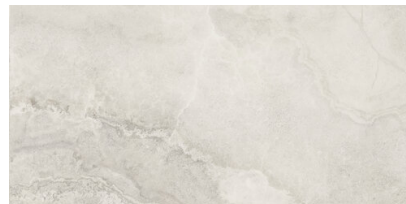

#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES


|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to acids                                    | EN ISO 10545-13 | GA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 5  |

#### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
|----------------------|----------------|---------|

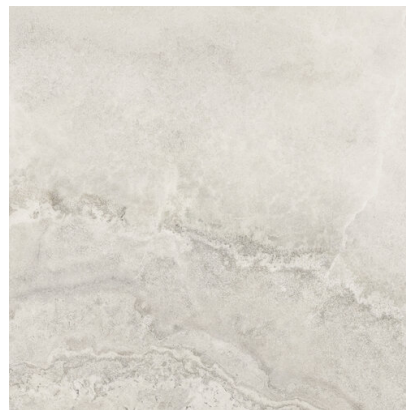

## CROSS WHITE RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038339</b> | 60X60     | 8,70           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to acids                                    | EN ISO 10545-13 | GA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 5  |

## CROSS WHITE RECT 30X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038343</b> | 30X60     | 8,70           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to acids                                    | EN ISO 10545-13 | GA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 5  |



## CROSS WHITE 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038540</b> | 15X15     | 8,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |            |   |
|----------------------------|------------|---|
| Slip resistance (barefeet) | EN 16165-A | C |
|----------------------------|------------|---|

## PELDAÑO RECTO CROSS WHITE C3

### 33X33

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038543</b> | 33X33     | 32,50          | EXTRUSI |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | 0,5 % = Eb=3%           |
| Flexion resistance                   | EN ISO 10545-04 | => 30 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |

## CROSS SAND RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038336</b> | 60X120    | 8,60           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to acids                                    | EN ISO 10545-13 | GA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 5  |

## ANTI-SLIP CROSS SAND RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038532</b> | 60X120    | 10,30          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES


|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to acids                                    | EN ISO 10545-13 | GA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 5  |

#### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
|----------------------|----------------|---------|

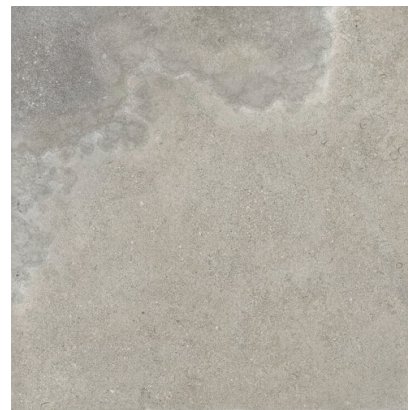

## CROSS SAND RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038340</b> | 60X60     | 8,90           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to acids                                    | EN ISO 10545-13 | GA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 5  |



## CROSS SAND 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038541</b> | 15X15     | 8,10           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |            |   |
|----------------------------|------------|---|
| Slip resistance (barefeet) | EN 16165-A | C |
|----------------------------|------------|---|

## PELDAÑO RECTO CROSS SAND C3

### 33X33

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038544</b> | 33X33     | 32,30          | EXTRUSI |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | 0,5 %= Eb=3%            |
| Flexion resistance                   | EN ISO 10545-04 | => 30 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |



## CROSS TAUPE 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038542</b> | 15X15     | 8,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |            |   |
|----------------------------|------------|---|
| Slip resistance (barefeet) | EN 16165-A | C |
|----------------------------|------------|---|

## PELDAÑO RECTO CROSS TAUPE C3

### 33X33

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038545</b> | 33X33     | 32,50          | EXTRUSI |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | 0,5 %= Eb=3%            |
| Flexion resistance                   | EN ISO 10545-04 | => 30 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |



## LAVABO DE PIE ROMA

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040867</b> |           | 0,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

### CHEMICAL PROPERTIES